


850 gsm Dam Liner

- ▶ Multilayer coating process improves waterhead
- ▶ Thicker coating to enhance lifespan

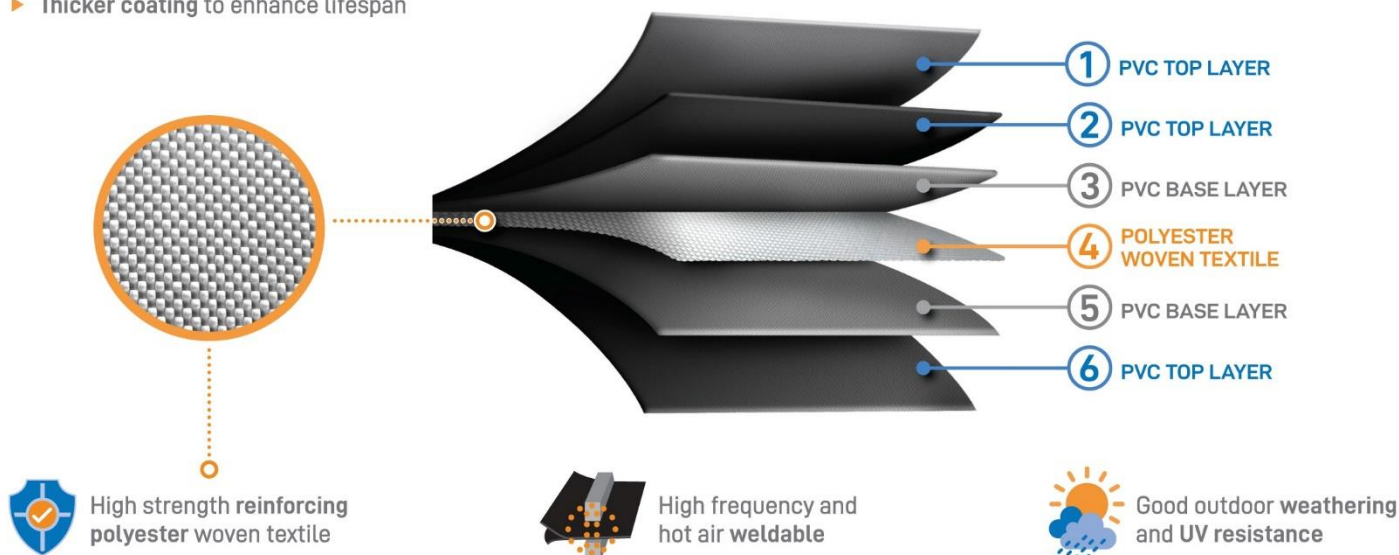

Technical Data

Product Code	850 DL 300	Product Weight	850g/m ²
Product Description	850G Dam Liner 3m	Product Width	3m
Formulation	Plasticised PVC	Roll Length	40m
Base Fabric	Woven Polyester	Emboss Finish	Gloss

✓ Visually inspected and graded

✓ Packaging on core in plastic sleeve

Typical Properties

Test	Method	Unit	Warp	Weft
Tensile Strength	SANS 1421: 1998	N/50mm	2500	2200
Tear Strength	ISO 4674-1: 2016 Method B	N	300	250
Weld Adhesion	ISO 2411: 2017	N/25mm	40	
Flame Retardancy	SANS 1287-1: 2007	s	NA	
Electrical Resistance	SANS 5880: 2008	MΩ	NA	
Fusion	5min in Acetone		No flaking	
Approximate Thickness		mm	0.68 – 0.72	

The information and results outlined in the data sheet are indicative based on historical data. It is always in our best interest to ensure that these values are repetitive and that the product is of consistent quality. The values should however be used as a guide only and are without warranty. It is therefore recommended that the product performance is tested by the user for its intended end application.

Tecco Polymer Coatings © All Rights Reserved • Document No: 4.1 • Revised: June 2020